

640x1920

Outdoor LED Poster

- 4500–5500 nits visible in sunlight
- IP65/IP54 protection for outdoor use
- Vertical folding structure for easy storage and transportation
- Wi-Fi/4G connection (optional) for content management anytime, anywhere
- Cascaded connection for a seamless visual experience
- Seamless cascading and splicing (optional)




320x160mm

Pixel Pitch	P2.5, P3.076, P4
Module size	320mm x 160mm
Refresh Rate	3840Hz
Cabinet Material	Iron Steel
Available Cabinet size	640mm x 1920mm / Customized



广告机 LED Poster			
型号 Model No	P2.5	P3.076	P4
点间距 Pixel Pitch	2.5mm	3.076mm	4mm
灯珠 LED Type	SMD1415	SMD1415	SMD1921
模组分辨率 Module Resolution	128x64	104x52	128x64
模组尺寸 Module Size	320mm x 160mm		
箱体尺寸 Cabinet Size	640mm x 1920mm, Customized		
箱体分辨率 Cabinet Resolution	256x768	208x624	160x480
像素总数 Total Pixel (dots)	196,608	129,792	76,800
驱动模式 Driving Mode	1/16	1/13	1/10
最小观看距离 Minium Viewing Distance	≥3.1m	≥3.9m	≥5m
亮度 Brightness (nits)	4500-5500	4500-5500	4500-5500
防护等级 IP Grade	Outdoor IP65/IP54		
刷新率 Refresh Rate	≥3840Hz		
色彩处理位深 Color processing (Bit)	13bits - 16bits		
可视角 Viewing Angle (H/V)	160°/160°		
最大能耗 Maximum Power Consumption	≤1050W/unit		
平均能耗 Average Power Consumption	≤350W/unit		
输入电压 Input Volage	AC 110V / 220 V @ 50Hz/60Hz		
工作温度 Operating Temperature	-20°C - 60°C		
工作湿度 Operating Humidity	10% - 90%		
箱体材质 Cabinet Material	Iron Stee		
维护方式 Maintenance Method	后维护 Rear Service		

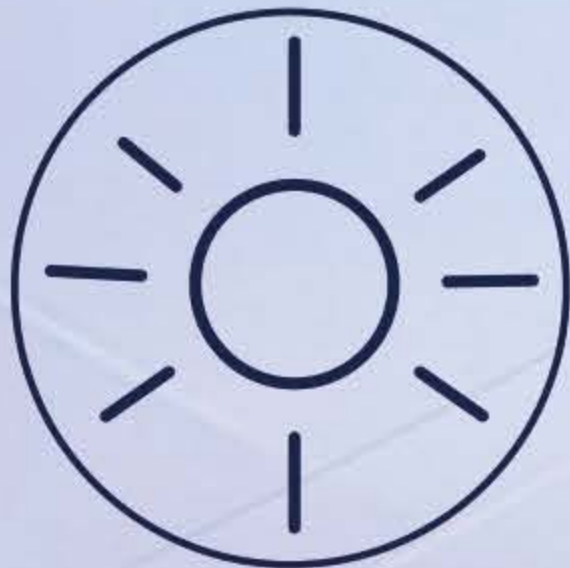

Outdoor



Waterproof



Wheel base



Seamless
splicing cascade